

**Features**

- Conductive plastic
- PC board and bushing mount
- Plastic bushing and plastic shaft
- Withstands typical industrial washing processes
- Compact package saves board and panel space
- Audio taper versions available as special order
- RoHS compliant versions available\*

**3310 - 9 mm Square Sealed Panel Control**

**Electrical Characteristics**

Standard Resistance Range - Linear .....	1 K ohms to 1 megohm
Total Resistance Tolerance - Linear Tapers .....	±20 %
Independent Linearity .....	±5 %
Absolute Minimum Resistance.....	2 ohms maximum
Effective Electrical Angle .....	270 ° ±15 °
Contact Resistance Variation.....	1 % or 1 ohm (whichever is greater)
Dielectric Withstanding Voltage (MIL-STD-202 – Method 301)	
Sea Level .....	900 VAC minimum
70,000 Feet.....	350 VAC minimum
Insulation Resistance .....	1,000 megohms minimum
Power Rating @ 70 °C (Derate to 0 at 125 °C - Voltage Limited By Power Dissipation or 200 VAC, Whichever is Less) .....	0.25 watts
Theoretical Resolution .....	Essentially infinite

**Environmental Characteristics**

Operating Temperature Range .....	-40 °C to +125 °C (-40 °F to +257 °F)
Storage Temperature Range .....	-55 °C to +125 °C (-67 °F to +257 °F)
Temperature Coefficient Over Storage Temperature Range .....	±1,000 ppm/°C
Vibration .....	30 G
Total Resistance Shift .....	±1 % maximum
Voltage Ratio Shift .....	±1 % maximum
Shock .....	100 G
Total Resistance Shift .....	±1 % maximum
Voltage Ratio Shift .....	±1 % maximum
Load Life .....	1,000 hours
Total Resistance Shift .....	±10 % TRS maximum
Rotational Life (No Load) .....	50,000 cycles
Total Resistance Shift .....	±5 % TRS maximum
Contact Resistance Variation .....	3 % or 3 ohms, whichever is greater
Moisture Resistance .....	MIL-STD-202, Method 103, Condition B
Total Resistance Shift .....	±10 % TRS maximum
IP Rating .....	IP67

**Mechanical Characteristics**

Stop Strength.....	5.65 N-cm (8 oz.-in.)
Mechanical Angle .....	300 ° nominal
Torque	
Starting .....	3.53 N-cm (5.0 oz.-in.) maximum
Running .....	3.53 N-cm (5.0 oz.-in.) maximum
Mounting (Torque on Bushing) .....	.45 N-cm (4.0 lb.-in.) max [plastic bushing]; 79 N-cm (7.0 lb.-in.) max [metal bushing]
Weight (Single Section).....	4.5 grams
(Each Additional Section) .....	2.5 grams
Terminals .....	
Soldering Condition	
Manual Soldering .....	96.5Sn/3.0Ag/0.5Cu solid wire or no-clean rosin cored wire; 370 °C (700 °F) max. for 3 seconds
Wave Soldering .....	96.5Sn/3.0Ag/0.5Cu solder with no-clean flux; 260 °C (500 °F) max. for 5 seconds
Wash Processes .....	For recommended wash processes, please refer to <a href="http://www.bourns.com/pdfs/sldclen.pdf">http://www.bourns.com/pdfs/sldclen.pdf</a>
Marking .....	Manufacturer's trademark, model number, product code, terminal style, resistance code and date code
Ganging.....	2 cups maximum
Hardware .....	One lockwasher and one mounting nut is shipped with each potentiometer, except where noted in the part number.
Flammability.....	Conforms to UL94V-0
Epoxy .....	Conforms to UL 94V-1
IP Rating .....	IP67

**Switch Characteristics**

Contact Resistance .....	2 ohms max.
Dielectric Strength .....	350 VDC
Detent Torque .....	0.5 oz-in min.
Power Rating (Resistive Load) .....	100 mA @ 16VDC

\*RoHS Directive 2002/95/EC Jan 27 2003 including Annex  
 Specifications are subject to change without notice.  
 Customers should verify actual device performance in their specific applications.

# 3310 - 9 mm Square Sealed Panel Control


**BOURNS®**

## Standard Resistance Table

Resistance (Ohms)	Resistance Code
<b>1,000</b>	<b>102</b>
<b>2,000</b>	<b>202</b>
<b>5,000</b>	<b>502</b>
<b>10,000</b>	<b>103</b>
<b>20,000</b>	<b>203</b>
50,000	503
100,000	104
200,000	204
500,000	504
1,000,000	105

Popular values listed in boldface. Consult factory for special resistances.

## Part Numbering System

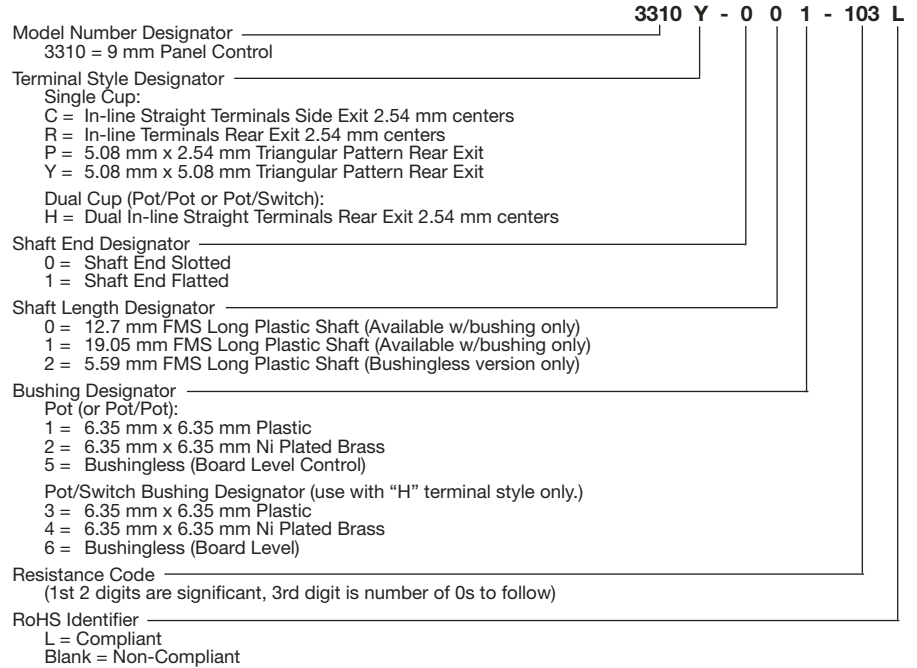

# 3310 - 9 mm Square Sealed Panel Control




**BOURNS®**

## Product Dimensions


### COMMON DIMENSIONS

#### 3310-001


Plastic Bushing  
Slotted Shaft

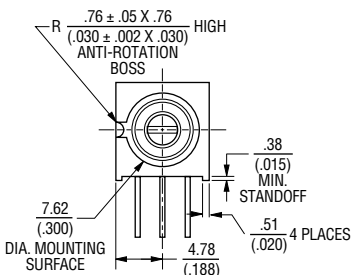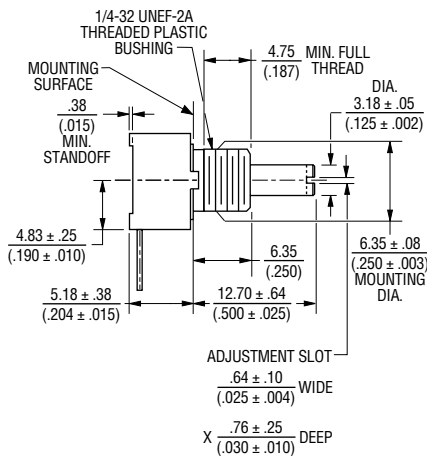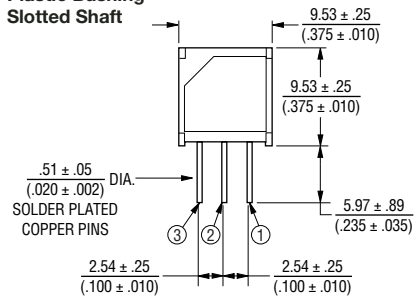



#### MOUNTING HOLE PATTERN

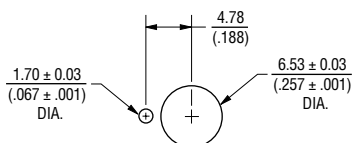



#### 3310C-001





#### 3310P-001

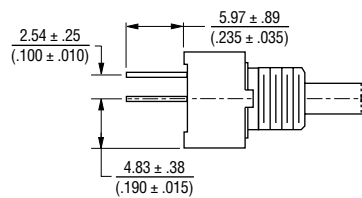

#### 3310R-001





#### 3310Y-001

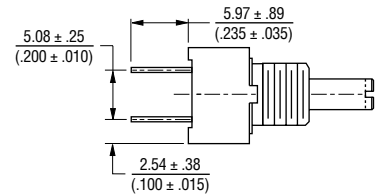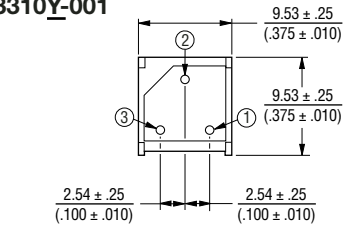

### COMMON DIMENSIONS

#### 3310C-101

Plastic Flatted Shaft

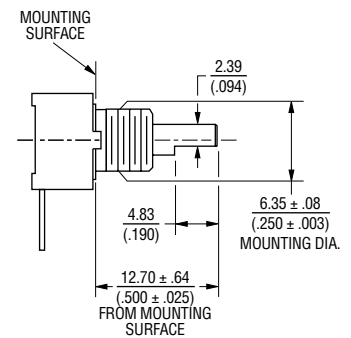

The shaft flat position as shown above is at 50 % of the mechanical travel.



DIMENSIONS ARE:  $\frac{\text{MM}}{\text{(INCHES)}}$

# 3310 - 9 mm Square Sealed Panel Control



**BOURNS®**

## Product Dimensions


### COMMON DIMENSIONS 3310-002 Metal Bushing

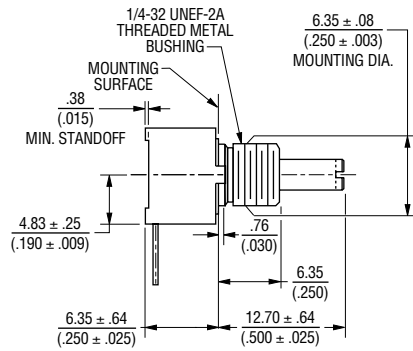

### 3310P-025 \* Bushingless

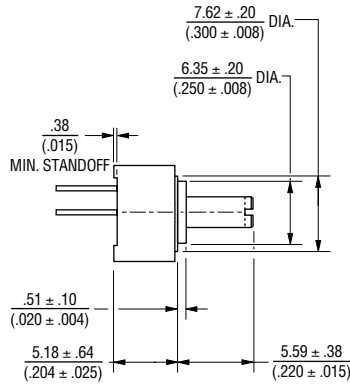

### 3310C-002

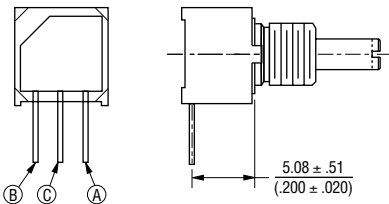

NOTE: \* Only recommended shaft length for bushingless version


DIMENSIONS ARE:  $\frac{\text{MM}}{\text{(INCHES)}}$

# 3310 - 9 mm Square Sealed Panel Control



**BOURNS®**

## Product Dimensions


### COMMON DIMENSIONS 3310H-003 Pot/Switch Dual Cup Plastic Bushing

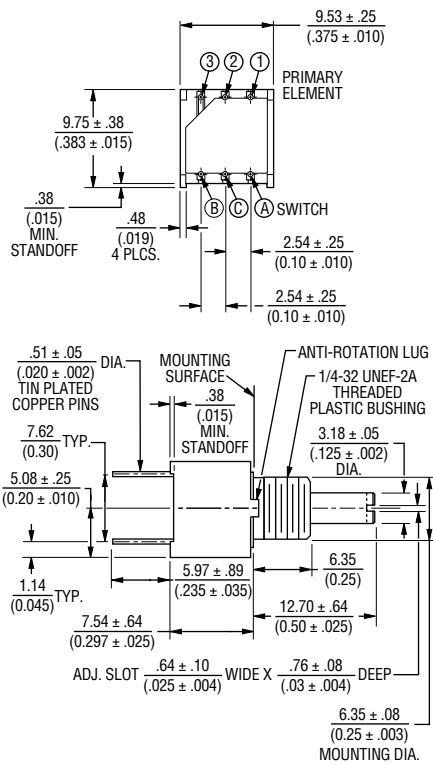



### 3310H-025\* Pot/Pot Dual Cup Bushingless

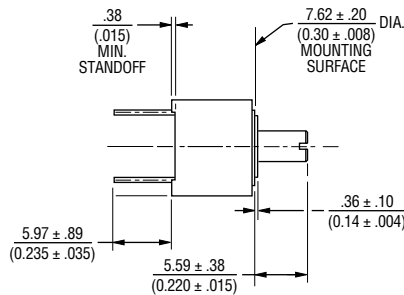


Pot/Pot Dual Cup




### 3310H-002 Pot/Pot Dual Cup Metal Bushing

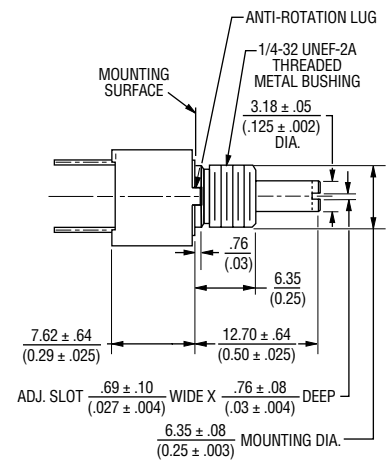

Pot/Switch Dual Cup



Pot Single Cup



NOTE: \* Only recommended shaft length for bushingless version

DIMENSIONS ARE:  $\frac{\text{MM}}{\text{(INCHES)}}$

REV. 10/08

Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.